

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-22/0365**  
**of 12 August 2022**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Injection system EJOT MULTIFIX SE1000 SEISMIC /  
Sormat ITH-EPOXe+

Product family  
to which the construction product belongs

Systems for post-installed  
rebar connections with mortar

Manufacturer

EJOT SE & Co. KG  
MU Construction  
In der Stockwiese 35  
57334 Bad Laasphe  
DEUTSCHLAND

Manufacturing plant

EJOT Herstellwerk 24

This European Technical Assessment  
contains

24 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330087-01-0601, Edition 06/2021

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The subject of this European Technical Assessment is the post-installed connection, by anchoring or overlap connection joint, of reinforcing bars (rebars) in existing structures made of normal weight concrete, using the "Injection system EJOT MULTIFIX SE 1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection" in accordance with the regulations for reinforced concrete construction.

Reinforcing bars made of steel with a diameter  $\phi$  from 8 to 40 mm or the tension anchor ZA of sizes M12 to M24 according to Annex A and injection mortar MULTIFIX SE 1000 SEISMIC / Sormat ITH-EPOXe+ are used for rebar connections. The rebar is placed into a drilled hole filled with injection mortar and is anchored via the bond between rebar, injection mortar and concrete.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the rebar connections of at least 50 and/or 100 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under static and quasi-static loading	See Annex C 1
Characteristic resistance under seismic loading	See Annex B 4 and C 2

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 3 to C 4

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330087-01-0601, the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.


Issued in Berlin on 12 August 2022 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock  
Head of Section


*beglaubigt:*  
Baderschneider

## Installation post installed rebar


**Figure A1:** Overlapping joint for rebar connections of slabs and beams

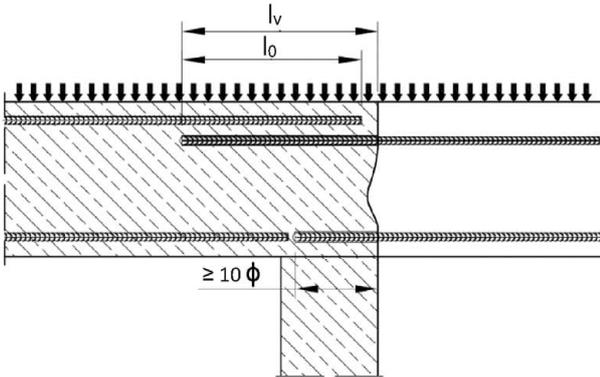


**Figure A2:** Overlapping joint at a foundation of a wall or column where the rebars are stressed in tension

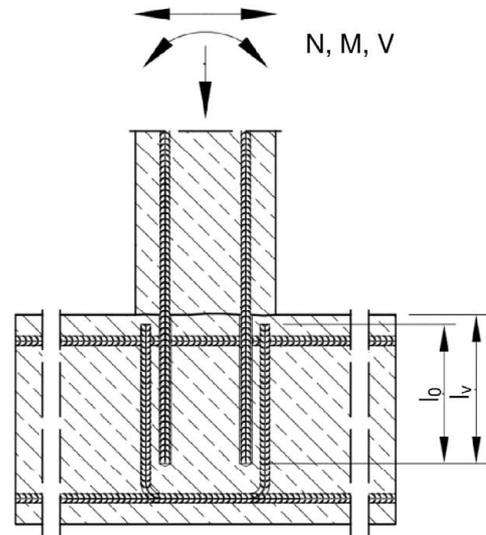


**Figure A3:** End anchoring of slabs or beams (e.g. designed as simply supported)

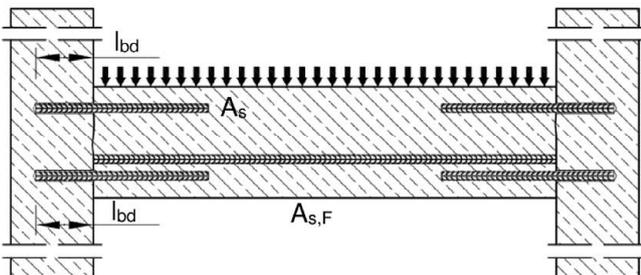

**Figure A4:** Rebar connection for components stressed primarily in compression. The rebars are stressed in compression

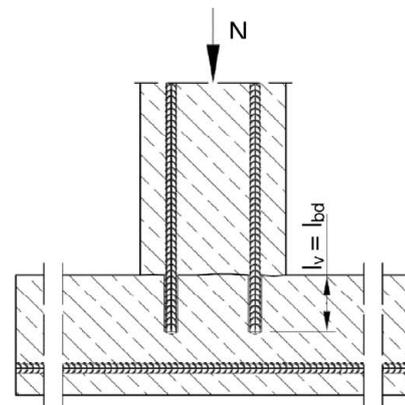

**Figure A5:** Anchoring of reinforcement to cover the line of acting tensile force

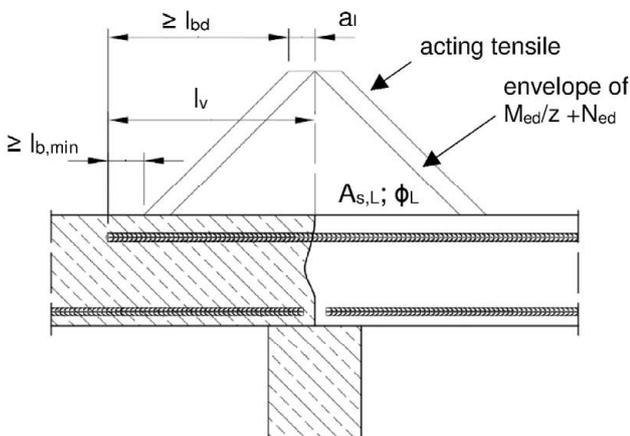

### Note to Figure A1 to A5:

In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2004+AC:2010.

Preparing of joints according to Annex B 2

Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection


### Product description

Installed condition and examples of use for rebars

**Annex A 1**


## Installation tension anchor ZA

**Figure A6:** Anchorage of column to foundation with tension anchor ZA.

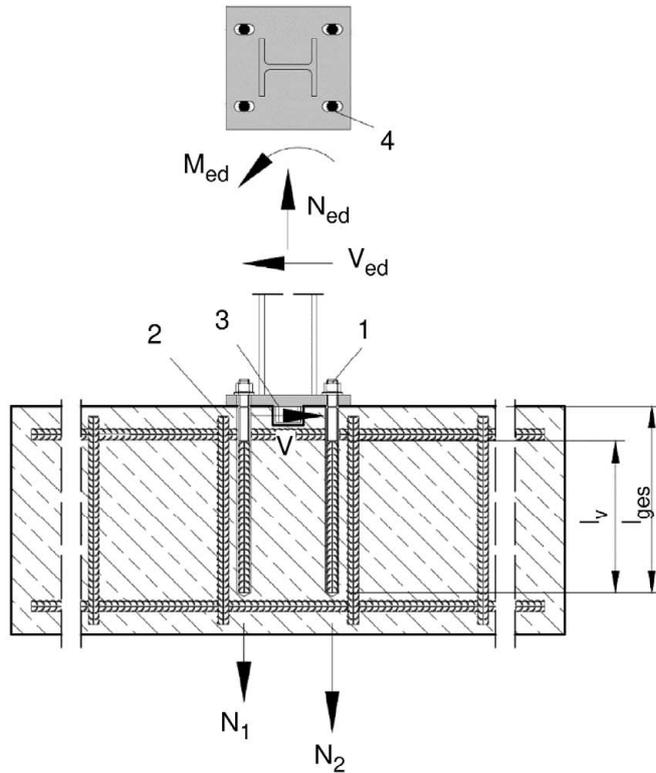

- 1 Tension anchor ZA (tension only)
- 2 Existing stirrup / reinforcement for overlap (lap splice)
- 3 Shear lug (or fastener loaded in shear)
- 4 Slotted hole with axial direction to the shear force

**Figure A7:** Anchorage of guardrail posts or cantilevered building components with tension anchor ZA and fastener.

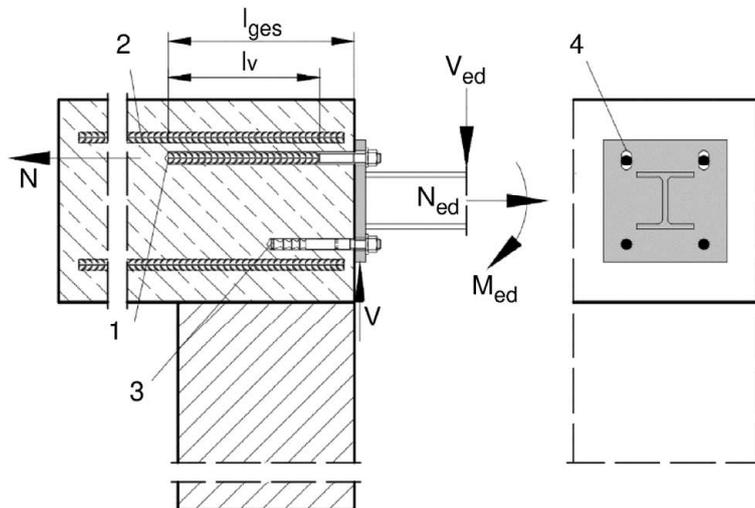

- 1 Tension anchor ZA (tension only)
- 2 Existing stirrup / reinforcement for overlap (lap splice)
- 3 Fastener (or shear lug loaded in shear)
- 4 Slotted hole with axial direction to the shear force

**Note to Figure A6 and A7:** In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2004+AC:2010. The tension anchor may be only used for axial tensile force. The tensile force must be transferred by lap to the existing reinforcement of the building. The transfer of the shear force has to be ensured by suitable measures, e.g. by means of shear lugs or anchors with European Technical Assessment (ETA). General construction rules see Annex B 3

**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**

**Product description**


Installed condition and examples of use for tension anchors ZA

**Annex A 2**


## Cartridge system

### Side-by-Side Cartridge:

440 ml, 585 ml and 1400 ml

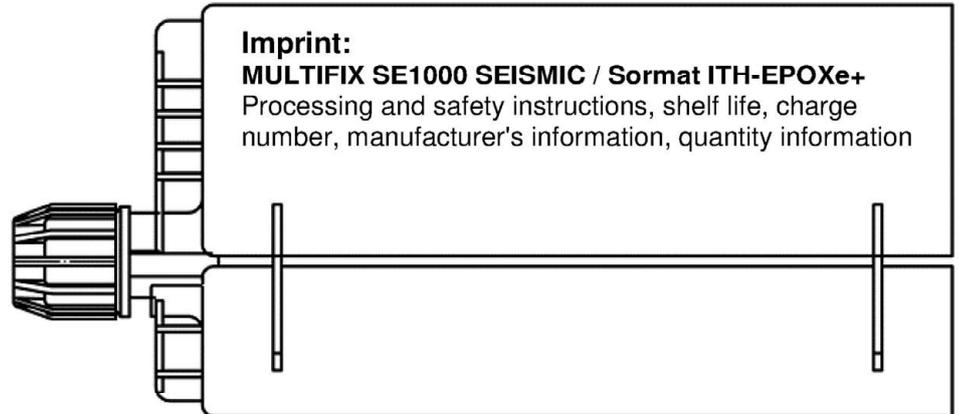

### Static mixer PM-19E

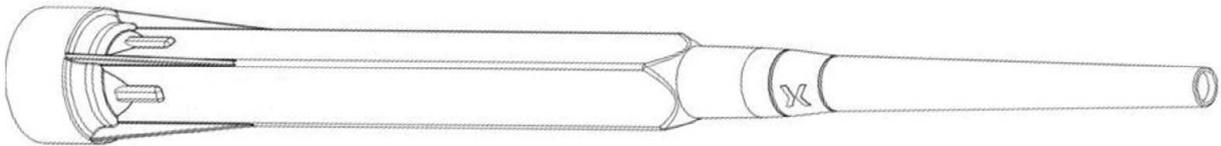

### Piston plug VS and mixer extension VL




Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection

Product description  
Injection system

Annex A 3

### Reinforcing bar (rebar): $\phi 8$ up to $\phi 40$



- Minimum value of related rip area  $f_{R,min}$  according to EN 1992-1-1:2004+AC:2010
- Rib height of the bar shall be in the range  $0,05\phi \leq h_{rib} \leq 0,07\phi$   
( $\phi$ : Nominal diameter of the bar;  $h_{rib}$ : Rib height of the bar)

**Table A1: Materials Rebar**

Designation	Material
Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C $f_{yk}$ and $k$ according to NDP or NCI of EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$

**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**


**Product description**  
Specifications Rebar

**Annex A 4**

### Tension Anchor: ZA-M12 up to ZA-M24

Marking: e.g.  12 A4

-  Mark of the producer
- ZA Trade name
- 12 Rod diameter/thread
- A4 for stainless steel A4
- HCR for high corrosion resistance steel

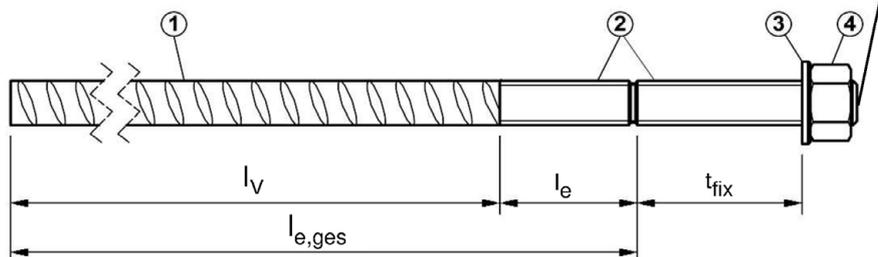

**Table A2: Materials Tension Anchor ZA**

Part	Designation	Material										
		ZA vz				ZA A4				ZA HCR		
		M12	M16	M20	M24	M12	M16	M20	M24	M12	M16	M20
1	Reinforcement bar	Class B according to NDP or NCI of EN 1992-1-1/NA $f_{tk} = f_{tk} = k \cdot f_{yk}$										
	$f_{yk}$ [N/mm <sup>2</sup> ]	500				500				500		
2	Threaded rod	Steel, zinc plated according to EN ISO 683-4:2018 or EN 10263:2001				Stainless steel, 1.4362, 1.4401, 1.4404, 1.4571, EN 10088-1:2014				High corrosion resistant steel, 1.4529, 1.4565, EN 10088-1:2014		
3	Washer	Steel, zinc plated according to EN ISO 683-4:2018 or EN 10263:2001				Stainless steel, 1.4362, 1.4401, 1.4404, 1.4571, EN 10088-1:2014				High corrosion resistant steel, 1.4529, 1.4565, EN 10088-1:2014		
4	Nut	Steel, zinc plated according to EN ISO 683-4:2018 or EN 10263:2001				Stainless steel, 1.4362, 1.4401, 1.4404, 1.4571, EN 10088-1:2014				High corrosion resistant steel, 1.4529, 1.4565, EN 10088-1:2014		

**Table A3: Dimensions and installation parameters**

Size			ZA-M12	ZA-M16	ZA-M20	ZA-M24	
Diameter of threaded rod	$d_s$	[mm]	12	16	20	24	
Diameter of reinforcement bar	$\phi$	[mm]	12	16	20	25	
Drill hole diameter	$d_o$	[mm]	16	20	25	32	
Diameter of clearance hole in fixture	$d_f$	[mm]	14	18	22	26	
With across nut flats	SW	[mm]	19	24	30	36	
Stress area	$A_s$	[mm <sup>2</sup> ]	84	157	245	353	
Effective embedment depth	$l_v$	[mm]	according to static calculation				
Length of bonded thread	plated	$l_e$	[mm]	≥ 20	≥ 20	≥ 20	≥ 20
	A4/HCR			≥ 100	≥ 100	≥ 100	≥ 100
Minimum thickness of fixture	min $t_{fix}$	[mm]	5	5	5	5	
Maximum thickness of fixture	max $t_{fix}$	[mm]	3000	3000	3000	3000	
Maximum installation torque	max $T_{inst}$	[Nm]	50	100	150	150	

**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**


**Product description**  
Specifications Tension Anchor ZA

**Annex A 5**

<b>Specification of the intended use</b>			
<b>Anchorage subject to:</b>		Working life 50 years	Working life 100 years
HD: Hammer drilling HDB: Hammer drilling with hollow drill bit CD: Compressed air drilling DD: Diamond drilling	static and quasi-static loads	Ø8 to Ø40 ZA-M12 to ZA-M24	Ø8 to Ø40 ZA-M12 to ZA-M24
	seismic action	Ø10 to Ø40	Ø10 to Ø40
	fire exposure	Ø8 to Ø40 ZA-M12 to ZA-M24	Ø8 to Ø40 ZA-M12 to ZA-M24
Temperature Range:	- 40°C to +80°C (max long-term temperature +50 °C and max short-term temperature +80 °C)		
<p><b>Base materials:</b></p> <ul style="list-style-type: none"> <li>- Reinforced or unreinforced normal weight concrete according to EN 206:2013 + A1:2016.</li> <li>- Concrete strength classes C12/15 to C50/60 according to EN 206:2013 + A1:2016.</li> <li>- Maximum chloride content of 0,40% (CL 0.40) related to the cement content according to EN 206:2013 + A1:2016.</li> <li>- Non-carbonated concrete.</li> </ul> <p>Note: In case of a carbonated surface of the existing concrete structure the carbonated layer shall be removed in the area of the post-installed rebar connection with a diameter of <math>\phi + 60</math> mm prior to the installation of the new rebar. The depth of concrete to be removed shall correspond to at least the minimum concrete cover in accordance with EN 1992-1-1:2004+AC:2010. The foregoing may be neglected if building components are new and not carbonated and if building components are in dry conditions.</p> <p><b>Use conditions (Environmental conditions) with tension anchor ZA:</b></p> <ul style="list-style-type: none"> <li>- Structures subject to dry internal conditions (all materials).</li> <li>- For all other conditions according to EN 1993-1-4:2006+A1:2015 corresponding to corrosion resistance class:                             <ul style="list-style-type: none"> <li>• Stainless steel Stahl A4 according to Annex A 4, Table A1: CRC III</li> <li>• High corrosion resistance steel HCR according to Annex A 4, Table A1: CRC V</li> </ul> </li> </ul> <p><b>Design:</b></p> <ul style="list-style-type: none"> <li>- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.</li> <li>- Verifiable calculation notes and drawings are prepared taking account of the forces to be transmitted.</li> <li>- Design according to EN 1992-1-1:2004+AC:2010, EN 1992-1-2:2004+AC:2008 and Annex B 2 and B 3.</li> <li>- The actual position of the reinforcement in the existing structure shall be determined on the basis of the construction documentation and taken into account when designing.</li> </ul> <p><b>Installation:</b></p> <ul style="list-style-type: none"> <li>- Dry or wet concrete. It must not be installed in flooded holes.</li> <li>- Overhead installation allowed.</li> <li>- Hole drilling by hammer drill (HD), hollow drill (HDB), diamond drill (DD) or compressed air drill mode (CD).</li> <li>- The installation of post-installed rebar resp. tension anchors shall be done only by suitable trained installer and under supervision on site; the conditions under which an installer may be considered as suitable trained and the conditions for supervision on site are up to the Member States in which the installation is done.</li> <li>- Check the position of the existing rebars (if the position of existing rebars is not known, it shall be determined using a rebar detector suitable for this purpose as well as on the basis of the construction documentation and then marked on the building component for the overlap joint).</li> </ul>			
<b>Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection</b>		<b>Annex B 1</b>	
<b>Intended use Specifications</b>			

**Figure B1: General construction rules for post-installed rebars**

- Only tension forces in the axis of the rebar may be transmitted.
- The transfer of shear forces between new concrete and existing structure shall be designed additionally according to EN 1992-1-1:2004+AC:2010.
- The joints for concreting must be roughened to at least such an extent that aggregate protrude.

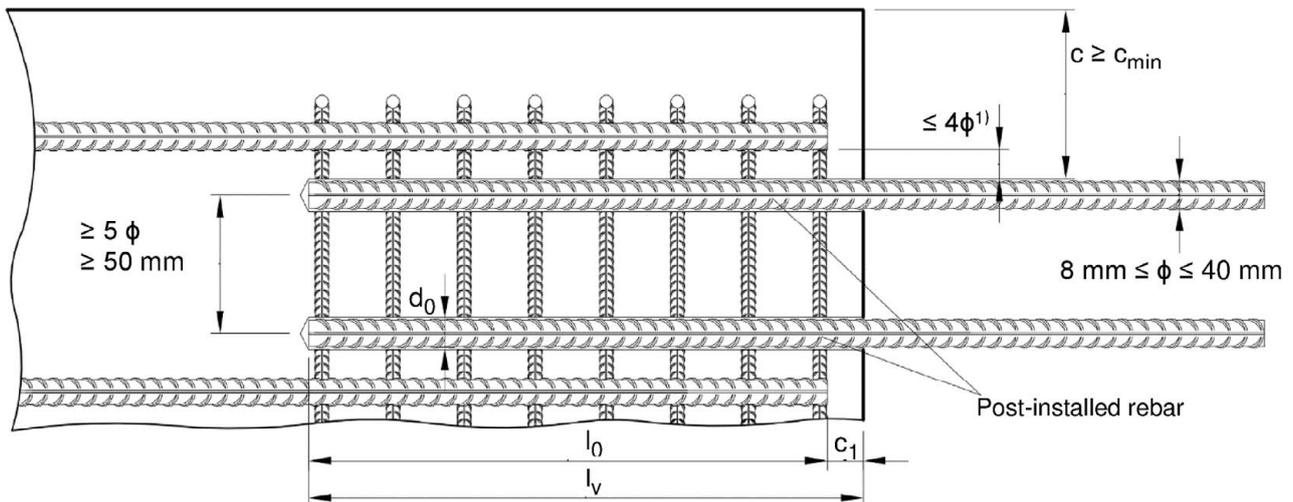

- 1) If the clear distance between lapped bars exceeds  $4\phi$ , then the lap length shall be increased by the difference between the clear bar distance and  $4\phi$ .

The following applies to Figure B1:

$c$	concrete cover of post-installed rebar
$c_1$	concrete cover at end-face of existing rebar
$c_{\min}$	minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
$\phi$	diameter of post-installed rebar
$l_0$	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
$l_v$	effective embedment depth, $\geq l_0 + c_1$
$d_0$	nominal drill bit diameter, see Annex B 5


**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**

**Intended use**  
General construction rules for post-installed rebars

**Annex B 2**

**Figure B2: General construction rules for tension anchors ZA**

- The length of the bonded-in thread may not be accounted as anchorage.
- Only tension forces in the direction of the bar axis may be transmitted by the tension anchor ZA.
- The tension force must be transferred via an overlap joint to the reinforcement in the building part.
- The transfer of shear forces shall be ensured by appropriate additional measures, e.g. shear lugs or by anchors with an European technical assessment.
- In the anchor plate, the holes for the tension anchors shall be executed as elongated holes with axis in the direction of the shear force.

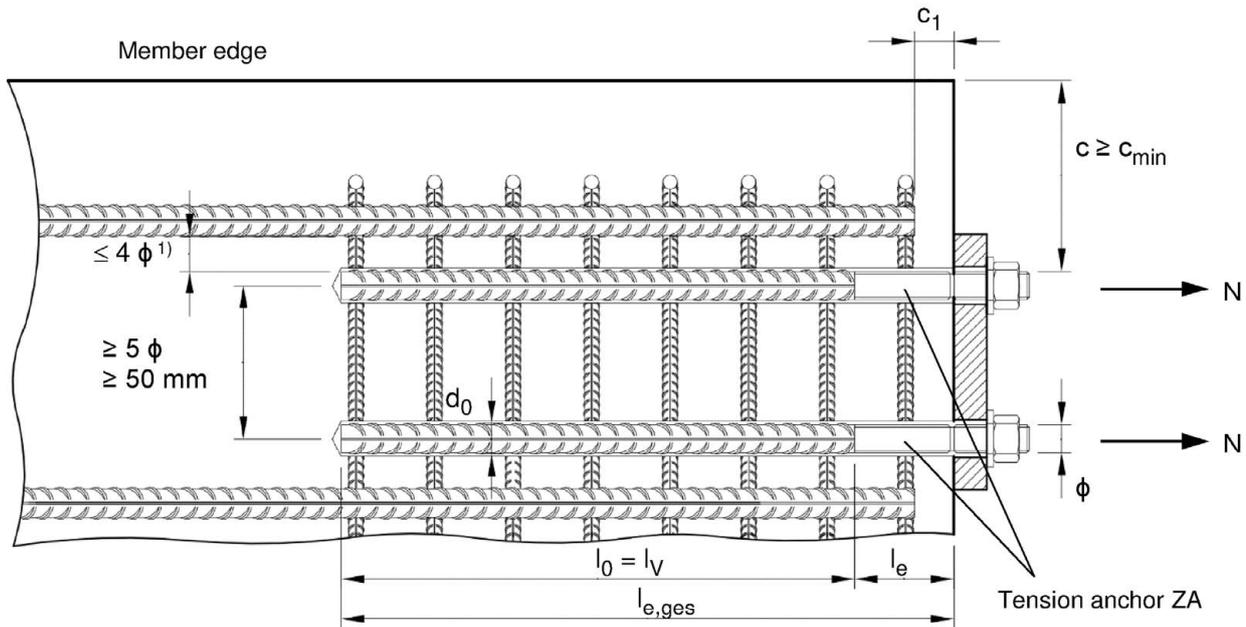

1) If the clear distance between lapped bars exceeds  $4\phi$ , then the lap length shall be increased by the difference between the clear bar distance and  $4\phi$ .

The following applies to Figure B2:

$c$	concrete cover of tension anchor ZA
$c_1$	concrete cover at end-face of existing rebar
$c_{min}$	minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
$\phi$	diameter of tension anchor
$l_0$	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
$l_v$	effective embedment depth
$l_e$	length of bonded thread
$l_{e,ges}$	overall embedment depth, $\geq l_0 + c_2$
$d_0$	nominal drill bit diameter, see Annex B 5


**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**

**Intended use**  
General construction rules for tension anchors ZA

**Annex B 3**

**Table B1: Minimum concrete cover  $c_{\min}^{1)}$  of post-installed rebar and tie rod ZA depending of drilling method**

Drilling method	Rebar diameter	Without drilling aid	With drilling aid
HD: Hammer drilling HDB: Hammer drilling with hollow drill bit	< 25 mm	$30 \text{ mm} + 0,06 \cdot l_v \geq 2 \phi$	$30 \text{ mm} + 0,02 \cdot l_v \geq 2 \phi$
	$\geq 25 \text{ mm}$	$40 \text{ mm} + 0,06 \cdot l_v \geq 2 \phi$	$40 \text{ mm} + 0,02 \cdot l_v \geq 2 \phi$
DD: Diamond drilling	< 25 mm	Drill rig used as drilling aid	$30 \text{ mm} + 0,02 \cdot l_v \geq 2 \phi$
	$\geq 25 \text{ mm}$		$40 \text{ mm} + 0,02 \cdot l_v \geq 2 \phi$
CD: Compressed air drilling	< 25 mm	$50 \text{ mm} + 0,08 \cdot l_v$	$50 \text{ mm} + 0,02 \cdot l_v$
	$\geq 25 \text{ mm}$	$60 \text{ mm} + 0,08 \cdot l_v \geq 2 \phi$	$60 \text{ mm} + 0,02 \cdot l_v \geq 2 \phi$



1) see Annex B 2, Figure B1 and Annex B 3, Figure B2  
Comments: The minimum concrete cover acc. EN 1992-1-1:2004+AC:2010 must be observed.  
For the minimum concrete cover  $c_{\min,seis}$  in case of a seismic action, see Table B2.

**Table B2: Minimum concrete cover  $\min c_{\min,seis}$**

Drilling method	Design conditions	Distance to 1st edge	Distance to 2nd edge
HD: Hammer drilling HDB: Hammer drilling with hollow drill bit CD: Compressed air drilling	Edge	$\geq 2 \phi$	$\geq 2 \phi$
	Corner	$\geq 2 \phi$	$\geq 2 \phi$
DD: Diamond drilling	Edge	$\geq 4 \phi$	$\geq 8 \phi$
	Corner	$\geq 6 \phi$	$\geq 6 \phi$

**Table B3: Dispensing tools**

Cartridge type/size	Hand tool		Pneumatic tool
Side-by-side cartridges 440, 585 ml	 e.g. SA 296C585	 e.g. Type H 244 C	 e.g. Type TS 444 KX
Side-by-side cartridges 1400 ml	-	-	 e.g. Type TS 471

All cartridges could also be extruded by a battery tool.

**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**

**Intended use**  
Minimum concrete cover  
Dispensing tools

**Annex B 4**

**Table B4: Brushes, piston plugs, max anchorage depth and mixer extension, hammer (HD), diamond (DD) and compressed air (CD) drilling**

Bar size $\phi$ [mm]	Tension anchor $\phi$ [mm]	Drill bit - $\emptyset$			$d_b$ Brush - $\emptyset$ [mm]	$d_{b,min}$ min. Brush - $\emptyset$ [mm]	Piston plug	Cartridge: 440 ml or 585 ml				Cartridge: 1400 ml				
		HD	DD	CD				Hand or battery tool		Pneumatic tool		Pneumatic tool				
								$l_{v,max}$ [mm]	Mixer extension	$l_{v,max}$ [mm]	Mixer extension	$l_{v,max}$ [mm]	Mixer extension			
8	-	10	-	RB10	11,5	10,5	-	250	VL10/0,75 or VL16/1,8	250	VL10/0,75 or VL16/1,8	250	VL10/0,75 or VL16/1,8			
-	700							800		800						
10	-	12	-	RB12	13,5	12,5	-	250		250		250		250		
-	700							1000		1000						
12	ZA-M12	14	-	RB14	15,5	14,5	VS14	250		250		250		250		
-	700							1200		1200						
14	-	18	-	RB18	20,0	18,5	VS18	700		1300		1400		1400		
16	ZA-M16							20		20		20		20		
20	ZA-M20	25	-	RB25	27,0	25,5	VS25	500		VL10/0,75 or VL16/1,8		1000		VL10/0,75 or VL16/1,8	2000	
-	-	26	RB26	28,0	26,5	VS25										
22	-	28	RB28	30,0	28,5	VS28										
24/25	ZA-M24	30	RB30	32,0	30,5	VS30										
-	-	32	RB32	34,0	32,5	VS32										
28	-	35	RB35	37,0	35,5	VS35										
32/34	-	40	RB40	43,5	40,5	VS40										
36	-	45	RB45	47,0	45,5	VS45										
40	-	52	52	RB52	54,0	52,5	VS52		-		-		-			-
-	-	55	-	55	RB55	58,0	55,5		VS55		-		-			-

**Table B5: Brushes, piston plugs, max anchorage depth and mixer extension, hammer drilling with hollow drill bit system (HDB)**

Bar size $\phi$ [mm]	Tension anchor $\phi$ [mm]	Drill bit - $\emptyset$ HDB [mm]	$d_b$ Brush - $\emptyset$	$d_{b,min}$ min. Brush - $\emptyset$	Piston plug	Cartridge: 440 ml or 585 ml				Cartridge: 1400 ml			
						Hand or battery tool		Pneumatic tool		Pneumatic tool			
						$l_{v,max}$ [mm]	Mixer extension	$l_{v,max}$ [mm]	Mixer extension	$l_{v,max}$ [mm]	Mixer extension		
8	-	10	No cleaning Required	-	-	250	VL10/0,75 or VL16/1,8	250	VL10/0,75 or VL16/1,8	250	VL10/0,75 or VL16/1,8		
-	700	800				800							
10	-	12				-		250		250		250	
-	700	1000						1000					
12	ZA-M12	14				VS14		700		1000		1000	
-	-	16				VS16		250		250		250	
14	-	18				VS18		700		VL10/0,75 or VL16/1,8		VL10/0,75 or VL16/1,8	VL10/0,75 or VL16/1,8
16	ZA-M16	20				VS20							
20	ZA-M20	25				VS25							
22	-	28				VS28		500		1000		1000	1000
24/25	ZA-M24	30				VS30							
-	-	32				VS32							
28	-	35				VS35							
32/34	-	40				VS40	-	-	-	-			

Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection

**Intended Use**

Parameter brushes, piston plugs, max anchorage depth and mixer extension

**Annex B 5**

## Cleaning and installation tools

### HDB – Hollow drill bit system



The hollow drill system consists of Heller Duster Expert hollow drill bit and a class M Hoover with a minimum negative pressure of 253 hPa and a flow rate of minimum 150 m³/h (42 l/s).

### Hand pump

(Volume 750 ml,  $h_0 \geq 10 d_s$ ,  $d_0 \leq 20\text{mm}$ )



### Manual slide valve

(min 6 bar)



### Brush RB



### Pistole Plug VS



### Brush extension RBL



Table B6: Working time and curing time

Temperature in base material			Maximum working time	Initial curing time <sup>1)</sup>	Minimum curing time <sup>2)</sup>
T			$t_{\text{work}}$	$t_{\text{cure,ini}}$	$t_{\text{cure}}$
0 °C	up to	+ 4 °C	80 min	30 h	144 h
+ 5 °C	up to	+ 9 °C	80 min	20 h	48 h
+ 10 °C	up to	+ 14 °C	60 min	15 h	28 h
+ 15 °C	up to	+ 19 °C	40 min	9 h	18 h
+ 20 °C	up to	+ 24 °C	30 min	6 h	12 h
+ 25 °C	up to	+ 34 °C	12 min	4 h	9 h
+ 35 °C	up to	+ 39 °C	8 min	3 h	6 h
+40°C			8 min	1,5 h	4 h
Cartridge temperature			+5°C up to +40°C		

1) After Initial curing time has elapsed, the installation of the connecting reinforcement and the construction of the formwork can be continued

2) The minimum curing time is only valid for dry base material.  
In wet base material the curing time must be doubled.

**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**

#### Intended Use


Cleaning and installation tools  
Working time and curing time

**Annex B 6**

## Installation instructions


**Attention: Before drilling, remove carbonated concrete and clean contact areas (see Annex B1)  
In case of aborted drill hole: the drill hole shall be filled with mortar.**

### Drilling of the bore hole

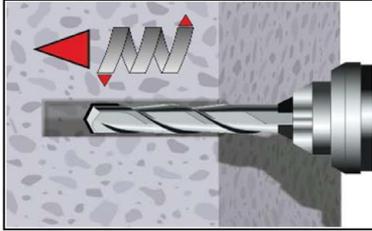


**1a. Hammer drilling (HD) / Compressed air drilling (CD)**

Drill a hole to the required embedment depth.  
Drill bit diameter according to Table B4.  
Proceed with Step 2 (MAC or CAC).

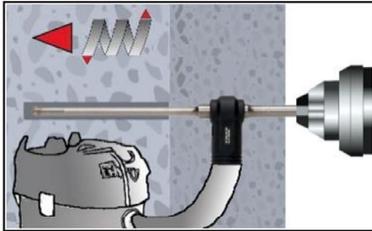

**1b. Hollow drill bit system (HDB) (see Annex B 6)**

Drill a hole to the required embedment depth.  
Drill bit diameter according to B5.  
The hollow drilling system removes the dust and cleans the bore hole.  
Proceed with Step 3.

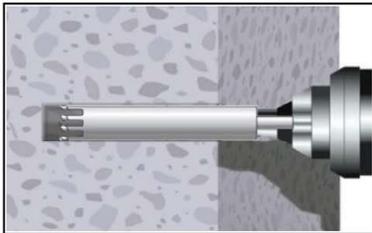

**1c. Diamond drilling (DD)**

Drill a hole to the required embedment depth required  
Drill bit diameter according to Table B4.  
Proceed with Step 2 (SPCAC).

**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**


**Intended use**  
Installation instruction

**Annex B 7**

**Installation instructions (continuation)**


**Manual Air Cleaning (MAC)**

for drill hole diameter  $d_0 \leq 20\text{mm}$  and drill hole depth  $h_0 \leq 10\phi$  with drilling method HD/CD

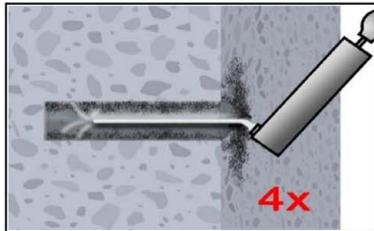


**Attention! Standing water in the bore hole must be removed before cleaning.**

2a. Blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 6).

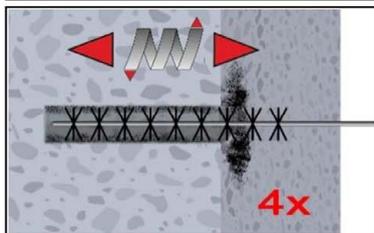


2b. Brush the bore hole minimum 4x with brush RB according to Table B4 over the entire embedment depth in a twisting motion (if necessary, use a brush extension RBL).

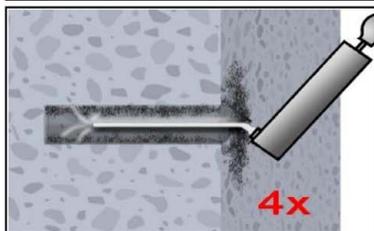

2c. Finally blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 6).


**Compressed Air Cleaning (CAC):**

All diameter with drilling method HD/CD

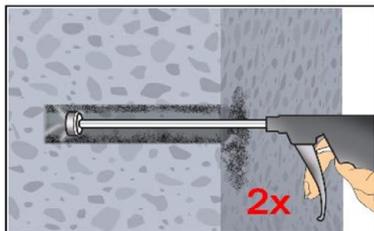


**Attention! Standing water in the bore hole must be removed before cleaning.**

2a. Blow the bore hole clean minimum 2x with compressed air (min. 6 bar) (Annex B 6) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)

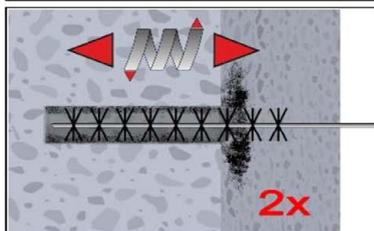

2b. Brush the bore hole minimum 2x with brush RB according to Table B4 over the entire embedment depth in a twisting motion. (If necessary, a brush extension RBL shall be used.)

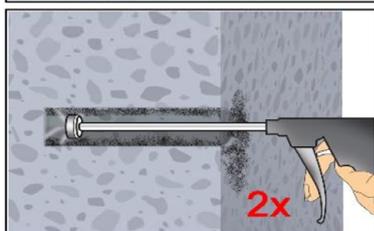

2c. Finally blow the bore hole clean minimum 2x with compressed air (min. 6 bar) (Annex B 6) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)

**Protect cleaned bore hole against re-contamination in an appropriate way. If necessary, repeat cleaning process directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.**

**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**

**Intended use**


Installation instructions (continuation)

**Annex B 8**


**Installation instructions (continuation)**

**Flush & Compressed Air Cleaning (SPCAC):**


All diameter with drilling method DD

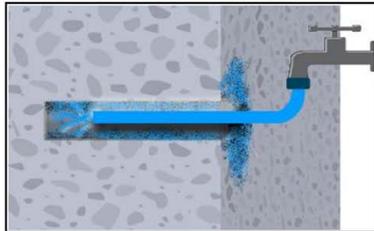


2a. Flushing with water until clear water comes out.

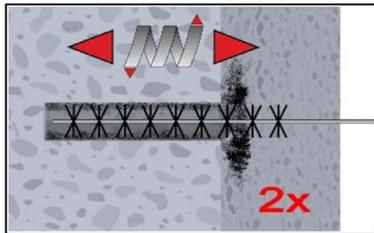


2b. Brush the bore hole minimum 2x with brush RB according to Table B4 over the entire embedment depth in a twisting motion. (If necessary, a brush extension RBL shall be used.)

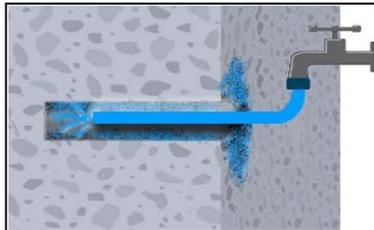


2c. Flushing again with water until clear water comes out.

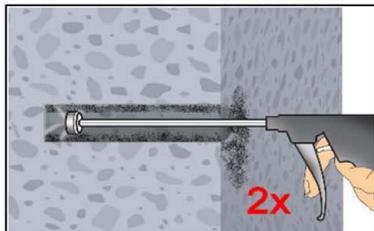

2d. Blow the bore hole clean minimum 2x with compressed air (min. 6 bar) (Annex B 6) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)

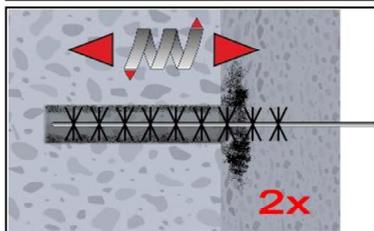

2e. Brush the bore hole minimum 2x with brush RB according to Table B4 over the entire embedment depth in a twisting motion. (If necessary, a brush extension RBL shall be used.)

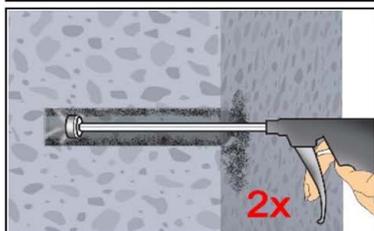

2f. Finally blow the bore hole clean minimum 2x with compressed air (min. 6 bar) (Annex B 6) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)


**Protect cleaned bore hole against re-contamination in an appropriate way. If necessary, repeat cleaning process directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.**

**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**


**Intended use**  
Installation instructions (continuation)

**Annex B 9**


Installation instructions (continuation)

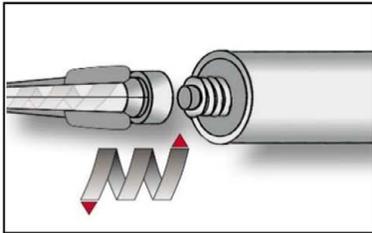

3. Screw on static-mixing nozzle PM-19E, and load the cartridge into an appropriate dispensing tool.  
For every working interruption longer than the maximum working time  $t_{work}$  (Annex B 6) as well as for new cartridges, a new static-mixer shall be used.


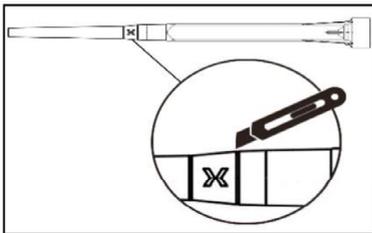


- 3a. In case of using the mixer extension VL16/1,8, cut off the tip of the mixer nozzle at position „X“.

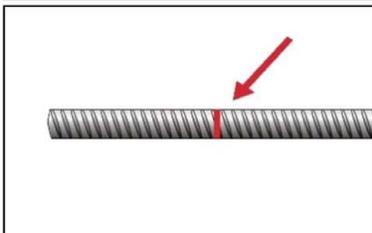


4. Mark embedment depth on the reinforcing bar.  
The reinforcing bar shall be free of dirt, grease, oil or other foreign material.

5. Mark mixer nozzle and extension with mortar level mark  $l_m$  and anchorage depth  $l_v$  resp.  $l_{e,ges}$   
Quick estimation:  $l_m = 1/3 \cdot l_v$   
Optimum mortar volume:  $l_m = l_v \text{ resp. } l_{e,ges} \cdot \left( 1,2 \cdot \frac{\phi^2}{d_0^2} - 0,2 \right)$

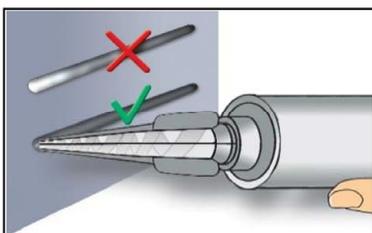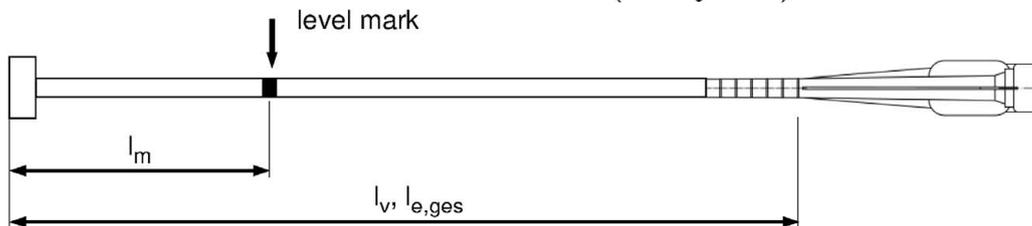

6. Not proper mixed mortar is not sufficient for fastening.  
Dispense and discard mortar until an uniform grey or red colour is shown (at least 3 full strokes).

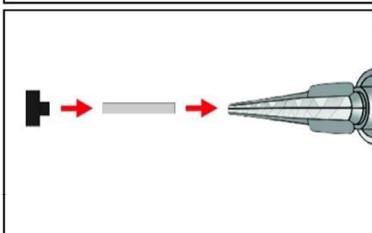


7. Piston plugs VS and mixer nozzle extensions VL shall be used according to Table B4 or B5.  
Assemble mixing nozzle, mixer extension and piston plug before injecting mortar.

Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection


Intended Use  
Installation instructions (continuation)

Annex B 10


Installation instructions (continuation)

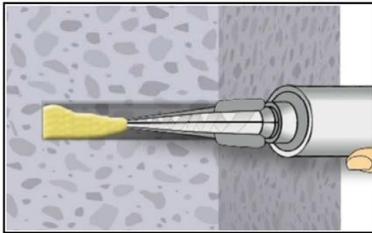


- 8a. Injecting mortar without piston plug VS:**  
Starting at bottom of the hole and fill the hole with adhesive until the mortar level mark is visible. (If necessary, a mixer nozzle extension shall be used.) Slowly withdraw of the static mixing nozzle avoid creating air pockets  
Observe the temperature related working time  $t_{work}$  (Annex B 6).

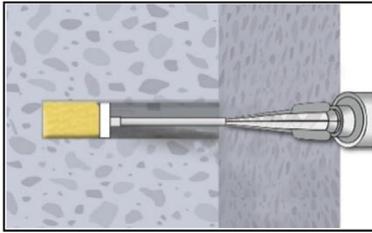


- 8b. Injecting mortar with piston plug VS:**  
Insert piston plug to bottom of the hole and fill the hole with mortar until mortar level mark  $l_m$  is visible. (If necessary, a mixer nozzle extension shall be used.) During injection the piston plug is pushed out of the bore hole by the back pressure of the mortar.  
Observe the temperature related working time  $t_{work}$  (Annex B 6).

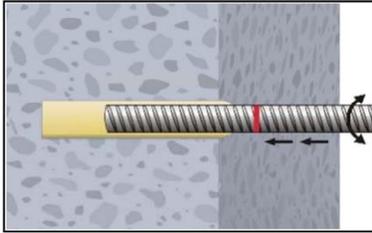


- 9.** Insert the reinforcing bar while turning slightly up to the embedment mark.

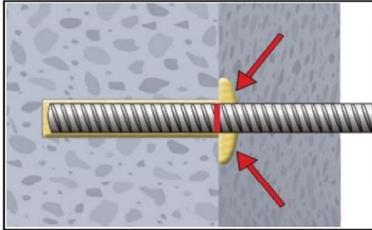

- 10.** Annular gap between reinforcing bar and base material must be completely filled with mortar. Otherwise, the installation must be repeated starting from step 8 before the maximum working time  $t_{work}$  has expired.

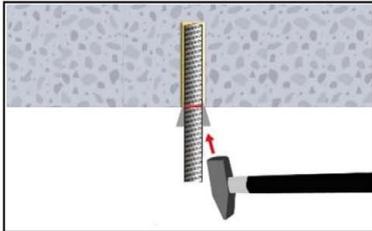

- 11.** For application in vertical upwards direction the reinforcing bar shall be fixed (e.g. wedges).

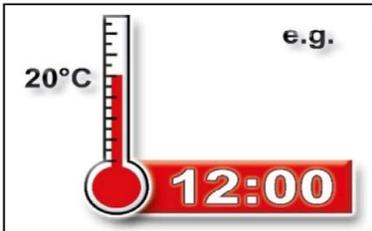

- 12.** Temperature related curing time  $t_{cure}$  (Annex B 6) must be observed. After initial curing time  $t_{cure,ini}$  has elapsed, the installation of the connecting reinforcement and the formwork can be continued. The full load to the reinforcing bar may be applied after the full curing time  $t_{cure}$  has elapsed.

Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection

Intended Use  
Installation instructions (continuation)

Annex B 11

<b>Table C1: Characteristic tension resistance for tension anchor ZA</b>										
Tension Anchor			M12	M16	M20	M24				
Steel, zinc plated (ZA vz)										
Characteristic tension resistance	$N_{Rk,s}$	[kN]	67	125	196	282				
Partial factor	$\gamma_{Ms,N}$	[-]	1,4							
Stainless Steel (ZA A4 or ZA HCR)										
Characteristic tension resistance	$N_{Rk,s}$	[kN]	67	125	171	247				
Partial factor	$\gamma_{Ms,N}$	[-]	1,4	1,3	1,4					
<b>Minimum anchorage length and minimum lap length under static or quasi-static loading</b>										
The minimum anchorage length $l_{b,min}$ and the minimum lap length $l_{0,min}$ according to EN 1992-1-1:2004+AC:2010 ( $l_{b,min}$ acc. to Eq. 8.6 and Eq. 8.7 and $l_{0,min}$ acc. to Eq. 8.11) shall be multiply by the amplification factor $\alpha_{lb} = \alpha_{lb,100y}$ according to Table C2.										
<b>Table C2: Amplification factor <math>\alpha_{lb} = \alpha_{lb,100y}</math> related to concrete strength class and drilling method; working life 50 and 100 years</b>										
Concrete strength class		Drilling method		Bar size		Amplification factor $\alpha_{lb} = \alpha_{lb,100y}$				
C12/15 to C50/60		all drilling methods		8 mm to 40 mm ZA-M12 to ZA-M24		1,0				
<b>Table C3: Reduction factor <math>k_b = k_{b,100y}</math> for all drilling methods; working life 50 and 100 years</b>										
Rebar		Concrete strength class								
$\phi$		C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 40 mm ZA-M12 to ZA-M24		1,0								
<b>Table C4: Design values of the ultimate bond stress <math>f_{bd,PIR}</math> and <math>f_{bd,PIR,100y}</math> in N/mm<sup>2</sup> for all drilling methods and for good conditions; working life 50 and 100 years</b>										
$f_{bd,PIR} = k_b \cdot f_{bd}$ $f_{bd,PIR,100y} = k_{b,100y} \cdot f_{bd}$ with $f_{bd}$ : Design value of the ultimate bond stress in N/mm <sup>2</sup> considering the concrete strength classes, the rebar diameter, the drilling method for good bond condition (for all other bond conditions multiply the values by $\eta_1 = 0.7$ ) and recommended partial factor $\gamma_c = 1,5$ according to EN 1992-1-1:2004+AC:2010. $k_b, k_{b,100y}$ : Reduction factor according to Table C3										
Rebar		Concrete strength class								
$\phi$		C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 32 mm ZA-M12 to ZA-M24		1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3
34 mm		1,6	2,0	2,3	2,6	2,9	3,3	3,6	3,9	4,2
36 mm		1,5	1,9	2,2	2,6	2,9	3,3	3,6	3,8	4,1
40 mm		1,5	1,8	2,1	2,5	2,8	3,1	3,4	3,7	4,0
<b>Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection</b>							<b>Annex C 1</b>			
<b>Performances</b> Characteristic tension resistance for tension anchor, Minimum anchorage length and minimum lap length, Amplification factor, Reduction factor and Design values of ultimate bond resistance										

**Minimum anchorage length and minimum lap length under seismic action**

The minimum anchorage length  $l_{b,min}$  and the minimum lap length  $l_{0,min}$  according to EN 1992-1-1:2004+AC:2010 ( $l_{b,min}$  acc. to Eq. 8.6 and Eq. 8.7 and  $l_{0,min}$  acc. to Eq. 8.11) shall be multiply by the amplification factor  $\alpha_{lb,seis} = \alpha_{lb,seis,100y}$  according to Table C5.

**Table C5: Amplification factor  $\alpha_{lb,seis} = \alpha_{lb,seis,100y}$  related to concrete strength class and drilling method; working life 50 and 100 years**

Concrete strength class	Drilling method	Bar size	Amplification factor $\alpha_{lb,seis} = \alpha_{lb,seis,100y}$
C16/20 to C50/60	all drilling methods	10 mm to 40 mm	1,0

**Table C6: Reduction factor  $k_{b,seis} = k_{b,seis,100y}$  for all drilling methods; working life 50 and 100 years**

Rebar $\phi$	Concrete strength classes								
	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
10 to 40 mm	No performance assessed 1,0								

**Table C7: Design values of the ultimate bond stress  $f_{bd,PIR,seis}$  and  $f_{bd,PIR,seis,100y}$  in N/mm<sup>2</sup> for all drilling methods and for good conditions; working life 50 and 100 years**

$$f_{bd,PIR,seis} = k_{b,seis} \cdot f_{bd}$$

$$f_{bd,PIR,seis,100y} = k_{b,seis,100y} \cdot f_{bd}$$

with

$f_{bd}$ : Design value of the ultimate bond stress in N/mm<sup>2</sup> considering the concrete strength classes, the rebar diameter, the drilling method for good bond condition (for all other bond conditions multiply the values by  $\eta_1 = 0.7$ ) and recommended partial factor  $\gamma_c = 1.5$  according to EN 1992-1-1:2004+AC:2010.

$k_{b,seis}, k_{b,seis,100y}$ : Reduction factor according to Table C6

Rebar $\phi$	Concrete strength classes								
	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
10 to 32 mm	No performance assessed	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3
34 mm	1,6	2,0	2,3	2,6	2,9	3,3	3,6	3,9	4,2
36 mm	1,5	1,9	2,2	2,6	2,9	3,3	3,6	3,8	4,1
40 mm	1,5	1,8	2,1	2,5	2,8	3,1	3,4	3,7	4,0

**Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection**

**Performances**

Minimum anchorage length and minimum lap length, Amplification factor, Reduction factor and Design values of ultimate bond stress under seismic action

**Annex C 2**

**Design value of the ultimate bond stress  $f_{bd,fi}$ ,  $f_{bd,fi,100y}$  at increased temperature for concrete strength classes C12/15 to C50/60, (all drilling methods); working life 50 and 100 years:**

The design value of the bond stress  $f_{bd,fi}$  at increased temperature has to be calculated by the following equation:

For working life 50 years:  $f_{bd,fi} = k_{fi}(\theta) \cdot f_{bd,PIR} \cdot \gamma_c / \gamma_{M,fi}$

with:  $\theta \leq 278^\circ\text{C}$ :  $k_{fi}(\theta) = 4673,8 \cdot \theta^{-1,598} / (f_{bd,PIR} \cdot 4,3) \leq 1,0$

$\theta > 278^\circ\text{C}$ :  $k_{fi}(\theta) = 0$

For working life 100 years:  $f_{bd,fi,100y} = k_{fi,100y}(\theta) \cdot f_{bd,PIR,100y} \cdot \gamma_c / \gamma_{M,fi}$

with:  $\theta \leq 278^\circ\text{C}$ :  $k_{fi,100y}(\theta) = 4673,8 \cdot \theta^{-1,598} / (f_{bd,PIR,100y} \cdot 4,3) \leq 1,0$

$\theta > 278^\circ\text{C}$ :  $k_{fi,100y}(\theta) = 0$

$f_{bd,fi}$ ,  $f_{bd,fi,100y}$  Design value of the ultimate bond stress at increased temperature in N/mm<sup>2</sup>

$\theta$  Temperature in °C in the mortar layer.

$k_{fi}(\theta)$ ,  $k_{fi,100y}(\theta)$  Reduction factor at increased temperature.


$f_{bd,PIR}$ ,  $f_{bd,PIR,100y}$  Design value of the bond stress  $f_{bd,PIR} = f_{bd,PIR,100y}$  in N/mm<sup>2</sup> in cold condition according to Table C4 considering the concrete strength classes, the rebar diameter, the drilling method and the bond conditions according to EN 1992-1-1:2004+AC:2010.

$\gamma_c$  = 1,5, recommended partial factor according to EN 1992-1-1:2004+AC:2010

$\gamma_{M,fi}$  = 1,0, recommended partial factor according to EN 1992-1-2:2004+AC:2008

For evidence at increased temperature the anchorage length shall be calculated according to EN 1992-1-1:2004+AC:2010 Equation 8.3 using the temperature-dependent design value of ultimate bond stress  $f_{bd,fi}$ ,  $f_{bd,fi,100y}$ .

**Example graph of Reduction factor  $k_{fi}(\theta)$ ,  $k_{fi,100y}(\theta)$  for concrete strength classes C20/25 for good bond conditions:**

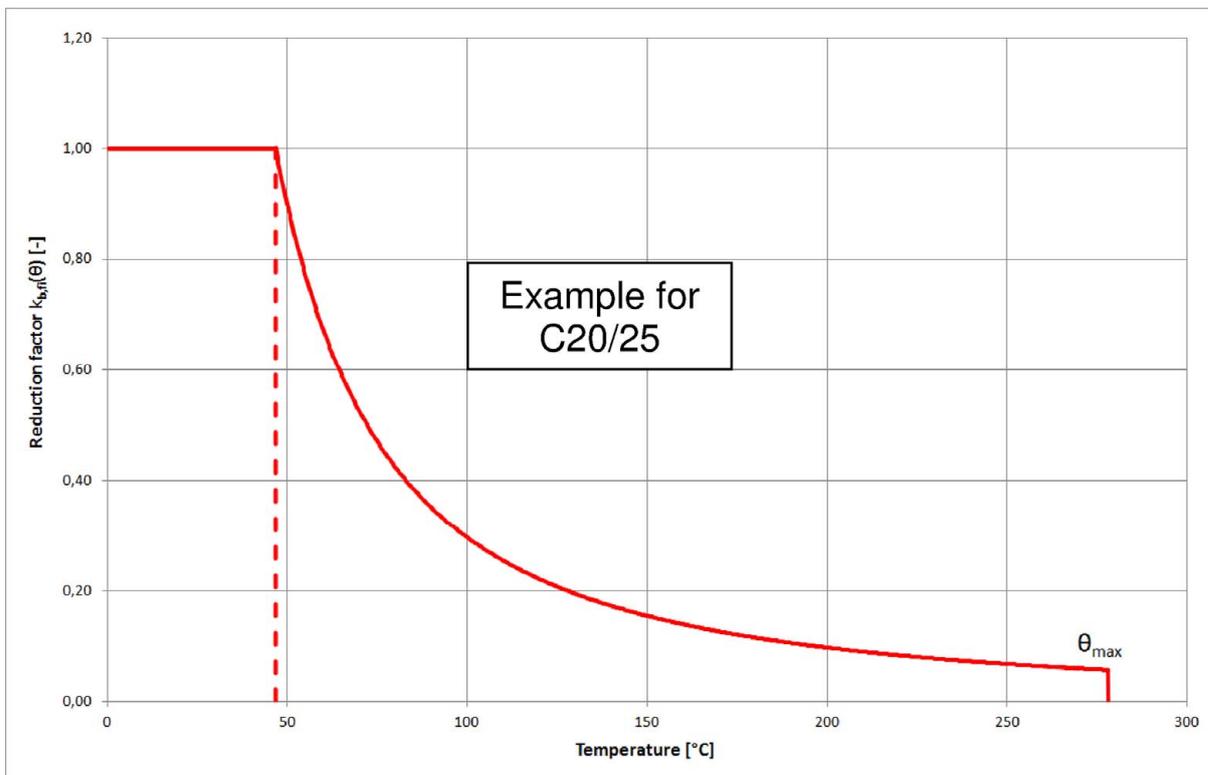

Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection

**Performances**  
Design value of ultimate bond stress at increased temperature

**Annex C 3**

**Table C8: Characteristic tension resistance for tension anchor ZA under fire exposure**

Tension Anchor				M12	M16	M20	M24
Steel, zinc plated (ZA vz)							
Characteristic tension resistance	R30	$N_{Rk,s,fi}$	[kN]	2,3	4,0	6,3	9,0
	R60			1,7	3,0	4,7	6,8
	R90			1,5	2,6	4,1	5,9
	R120			1,1	2,0	3,1	4,5
Stainless Steel (ZA A4 or ZA HCR)							
Characteristic tension resistance	R30	$N_{Rk,s,fi}$	[kN]	3,4	6,0	9,4	13,6
	R60			2,8	5,0	7,9	11,3
	R90			2,3	4,0	6,3	9,0
	R120			1,8	3,2	5,0	7,2
Injection system EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ for rebar connection				<b>Annex C 4</b>			
Performances Characteristic tension resistance for tension anchor ZA under fire exposure							